

QUAD

Position Sensing Power & Energy Detectors




KEY FEATURES

- 1. MEASURE, TRACK AND ALIGN**
With μm resolution in real time!
- 2. 4-CHANNEL DETECTORS**
Unique pyroelectric QUADrant detector technology handles high peak power without saturation
- 3. FOR CW, PULSED AND HIGH REP RATE LASERS**
 - QUAD-E: Energy per pulse from μJ to mJ
 - QUAD-P: Powers from μW to mW
- 4. FROM UV TO FIR AND THz**
Broadband detectors cover the full spectrum, from UV to Sub-Millimeter wavelengths
- 5. LARGE AREA SENSORS**
9 mm and 20 mm square detectors
- 6. FAST USB 2.0 CONNECTION**
Ensures full speed tracking
- 7. INCLUDES APPLICATION SOFTWARE**
Complete LabView Application Software included, with many features

CONNECTIVITY




QUAD-9-MT-E
(9 x 9 mm-For Energy)



QUAD-20-MT-E
(20 x 20 mm-For Energy)



QUAD-9-MT-P
(9 x 9 mm-For Power)



QUAD-20-MT-P
(20 x 20 mm-For Power)

ACCESSORIES



Stand with Delrin Post
(Model Number: 200428)



Additional 9V Power Supply
(Model Number: 200960)



USB Cable
(Model Number: 202373)



SDC-500 Digital
Optical Chopper (for -P)



Pelican Carrying Case

SEE ALSO

TECHNICAL DRAWINGS	144
LIST OF ALL ACCESSORIES	194

APPLICATION NOTES

LASER POSITION SENSING DETECTORS
AND MONITOR [201930](#)

SDC-500 DIGITAL OPTICAL CHOPPER [202154](#)

Watch the Introduction video available on our website at www.gentec-eo.com

QUAD



SPECIFICATIONS

	QUAD-9-MT-E / QUAD-9-MT-P		QUAD-20-MT-E / QUAD-20-MT-P	
MAX ENERGY / AVG POWER	20 mJ / 200 mW		20 mJ / 200 mW	
MAX POSITION RESOLUTION	1 μm / 10 μm		1 μm / 10 μm	
EFFECTIVE APERTURE	9 x 9 mm		20 x 20 mm	
MEASUREMENT CAPABILITY				
Spectral Range	0.1 - 3000 μm		0.1 - 3000 μm	
Min Beam Size ^a	≥ 4.5 mm Ø		≥ 10 mm Ø	
For -E (Energy sensors)				
Max Measurable Energy	20 mJ/Channel		20 mJ/Channel	
Noise Equivalent Energy	0.5 μJ		1.0 μJ	
Rise Time (0-100%)	150 μs		150 μs	
Max Repetition Rate	1000 Hz		1000 Hz	
Max Pulse Width	2.5 μsec		2.5 μsec	
Sensitivity	1000 V/J		1000 V/J	
For -P (Power sensors)				
Max Measurable Power	200 mW		200 mW	
Noise Equivalent Power	1 μW		2 μW	
Rise Time (0-100%)	< 0.02 s		< 0.02 s	
Max Chopping Frequency	50 Hz		50 Hz	
Sensitivity	2000 V/W		2000 V/W	
Calibration Uncertainty	± 4%		± 4%	
Minimum Position Resolution	-E: 1 μm		-E: 1 μm	
With QUAD-4Track Monitor	-P: 10 μm		-P: 10 μm	
DAMAGE THRESHOLDS				
Max Average Power Density (@ 1.064 μm)	100 mW/cm²		100 mW/cm²	
Max Energy Density (@ 1.064 μm 10 ns)	50 mJ/cm²		50 mJ/cm²	
PHYSICAL CHARACTERISTICS				
Effective Aperture	9 x 9 mm		20 x 20 mm	
Sensor	Pyroelectric		Pyroelectric	
Absorber	MT		MT	
Dimensions	63.5Ø X 40.6D mm		63.5Ø X 40.6D mm	
Weight	181 g		181 g	
ORDERING INFORMATION				
Product Name (Detectors)	QUAD-9-MT-E-D0	QUAD-9-MT-P-D0	QUAD-20-MT-E-D0	QUAD-20-MT-P-D0
Product Number (without stand)	201774	201776	201775	201777
Product Name (Module)	QUAD-4Track-D0			
Product Number (without stand)	201517			

Specifications are subject to change without notice // Compatible stand: P/N 200160

a. For optimal performance.

* For details, contact your Gentec-EO representative

QUAD



QUAD-4Track
(Front View)



QUAD-4Track
(Rear View)



QUAD-4TRACK

The QUAD-4Track is a Laser Position Sensing system designed to support our unique Pyroelectric Quadrant Detectors, QUAD-P and QUAD-E. It is a 4-channel microprocessor-based system that measures the voltage output of each QUAD element and does the math necessary to provide a measurement of the X and Y displacement of a laser beam or image. It is fast and can be used to track, align and/or measure movement in real time, with a resolution of just a few microns!

SPECIFICATIONS & FEATURES

QUAD-4TRACK-D0


Number of Channels	4
Full Scale Ranges (4 Decades) (E / P)	
Joulemeter Mode (with QUAD-E)	20 μ J to 20 mJ
Radiometer Mode (with QUAD-P)	200 μ W to 200 mW
USB Connection to Computer	YES (USB 2.0 Full Speed)
Power Supply	9VDC
Power On Light	YES
Detector Input	DB-25 Connector
Detector Analog Output	BNC Connector (0-2 V)
Trigger Input (TTL)	BNC Connector with LED Indicator
Product Number	201517

QUAD DETECTORS

Our large area Pyroelectric Quadrant Detectors provide unique advantages over other position sensing detectors like Silicon quads or lateral effect photodiodes. They are fast, handle high peak power of pulsed lasers without saturation and respond to lasers across the spectrum, from UV to Far IR and even THz. The QUAD-E is intended for use with pulsed sources at up to 1000 Hz, while the QUAD-P is designed for CW and High Repetition Rate (Quasi CW) sources. Both types of detectors can also be used as standalone units, in an analog mode, for incorporation into your own system application. We can provide a Lemo pigtail cable for this purpose.


ANALOG OUTPUT

The analog output of the QUAD-4Track provides voltage that is directly proportional to the pulse energy or laser power irradiating each QUAD element. When the four voltage outputs are equal, the beam is centered on the QUAD detector. This provides a very useful tool when setting up our QUAD probes with your source for optical alignment.

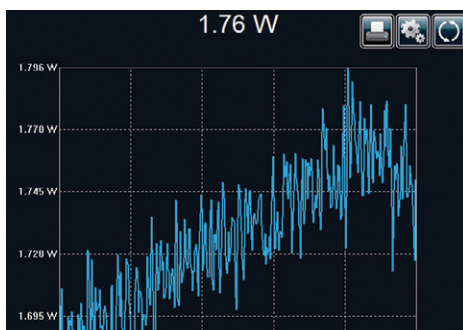


QUAD

MEASUREMENT SCREEN

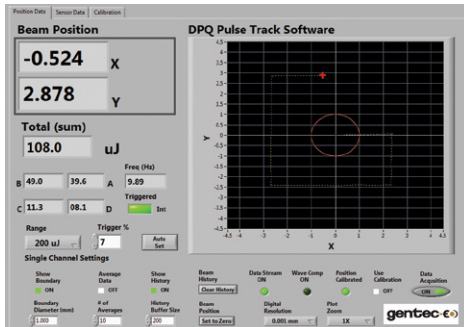

QUAD-4Track includes powerful, stand alone, LabView Software which is used to control the instrument, process the data, and display X and Y position. It also displays the energy or power of your source and repetition rate. The large graphic in this screen shows the position of the centroid of the beam and tracks its movement in real time. The software includes many handy features like: set boundary, zoom (2X to 128X), set resolution, data logging, and many more. The green line represents the tracking history.

TRACKING THE BEAM OVER TIME

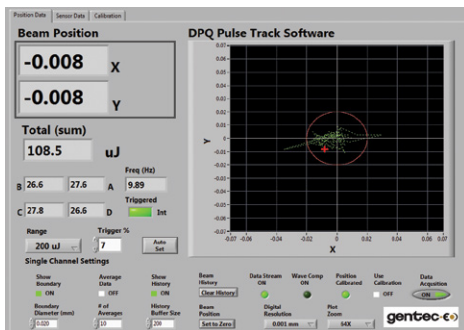

In the measurement screen shown on the left, we are tracking the beam stability of a pulsed Nd:YLF laser at 10 Hz. The resolution was set at 0.001 μm , the boundary is at 20 μm (red circle), and the zoom feature is at 64X. The total energy is 108.5 μJ , the final position of the laser is at -8 μm in X and -8 μm in Y. The green tracking line shows the movement of the laser about the zero position over a few hundred pulses.

POSITION CALIBRATION SCREEN

Calibrate Beam Position

$$\text{Calculated} = A \times \text{Measured}^2 + B \times \text{Measured} + C \times \text{Measured}^3 + D \times \text{Measured}^4 + E \times \text{Measured}^5 + F \times \text{Measured}^6 + G \times \text{Measured}^7 + H \times \text{Measured}^8$$

Set Positions	Measured Positions	Corrected Positions	Coefficients
-2.00E+0	-4.14E+0	-2.00E+0	H 7.32E-3
-1.50E+0	-3.66E+0	-1.50E+0	G 3.14E-1
-1.00E+0	-2.77E+0	-9.99E-1	F -4.03E-3
-5.00E-1	-1.51E+0	-5.01E-1	E 9.94E-3
0.00E+0	-1.86E-2	1.46E-3	D 6.40E-4
5.00E-1	1.50E+0	4.99E-1	C -8.66E-4
1.00E+0	2.76E+0	1.00E+0	B -2.17E-5
1.50E+0	3.62E+0	1.50E+0	A 5.12E-5
2.00E+0	4.11E+0	2.00E+0	

We've developed a unique position calibration routine which allows you to calibrate our QUAD-4Track system when working with a uniformly round laser beam. It requires the use of a micrometer-driven linear stage (1-axis only). As you can see from the calibration screen on the left, the procedure involves zeroing the instrument, moving the QUAD probe to nine discrete positions (+2.000 to -2.000 mm) and then capturing the QUAD readings. It then determines correction coefficients (last column) and applies them to the raw data to arrive at "corrected positions". The QUAD probe is now calibrated!

DATA LOGGING

	A	B	C	D	E	F
1 Time		Energy (uJ)	X	Y		
2	54:01.9	100.3	-0.008	-0.023		
3	54:05.9	100.3	-0.013	-0.024		
4	54:09.9	100.4	-0.015	-0.02		
5	54:13.9	100.4	0.04	0.025		
6	54:17.9	100.4	0.029	-0.069		
7	54:22.0	100.4	-0.376	-0.08		
8	54:26.0	100.3	-0.041	-0.069		
9	54:30.0	100.4	-0.036	-0.073		
10						
11						
12						
13						
14						
15						

Another very handy feature is "data logging". This allows you to set up the QUAD-4Track to follow the displacement, energy and/or power of your laser over several minutes, hours or even days. Need to measure the "beam steering" of your laser as it warms up? This is how you do it! Need to measure the beam displacement vs laser repetition rate or energy level? Data logging will help you measure it!